



DATASHEET

of SAW Devices

SAW Resonator

Part Number: SXR304M300AS06

Center Frequency: 304.300MHz

Package: SMD5050

- Package Dimensions
- Testing Environment
- Electrical Characteristics
- Frequency Characteristics

SAW Components	SAW Resonator
Part Number	SXR304M300AS06


Revision Record

Revision Number	Date	Description
SXR304M300AS06_A/0	2023-05-11	Reversion A/0

1. Features

- 1-port SAW resonator
- Ceramic package for Surface Mounted Technology (SMT)
- Lead-free production and RoHS Compliant
- Electrostatic Sensitive Device(ESD)
- Moisture Sensitivity Level 2

2. Package Dimension(Unit: mm)

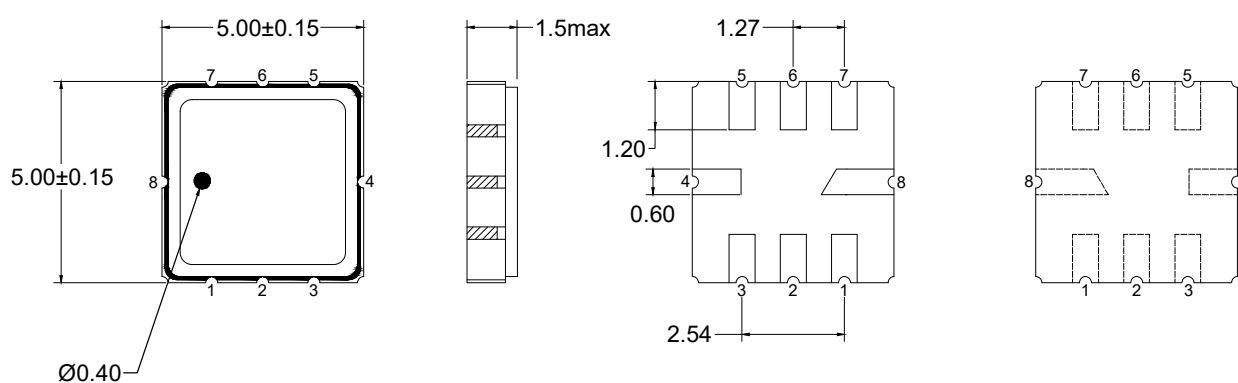

Pin Configuration	
2	Input/Output
6	Output/Input
1, 3, 5, 7	To Be Ground
4, 8	Case Ground


SAW Components

SAW Resonator

Part Number

SXR304M300AS06

3. Measurement Circuit

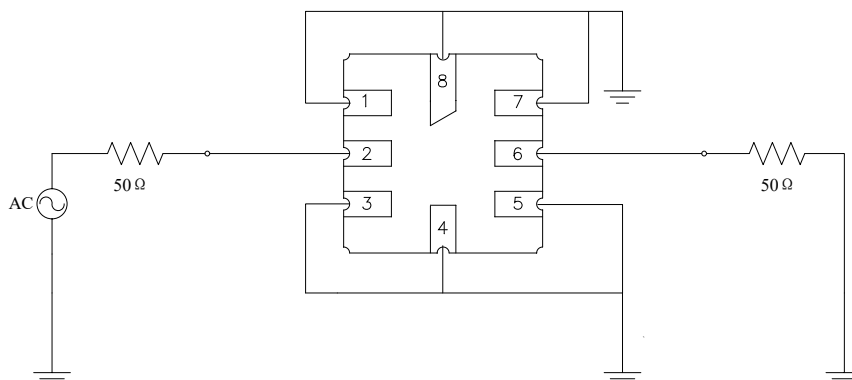

4. Maximum Rating

Rating		Value	Unit
RF Input Power	P	10	dBm
DC Voltage	V _{DC}	10	V
Operating Temperature Range	T _A	-40 ~ +85	°C
Storage Temperature Range	T _{stg}	-40 ~ +85	°C
ESD Voltage(MM)	V _{MM}	50	V
ESD Voltage(HBM)	V _{HBM}	175	V

5. Electrical Specification

Item	Frequency Range	Characteristics			
		min.	typ. ¹	max.	Unit
Center Frequency	Absolute Frequency	304.225	304.30	304.375	MHz
	Tolerance from 304.300MHz	-	±75	-	kHz
Insertion Loss	Min.	-	1.5	2.2	dB
Anti-resonance	-	24	25	-	dB

1. Typical value at 25±2deg.C

6. Frequency Characteristics

